


CONTROL PANELS

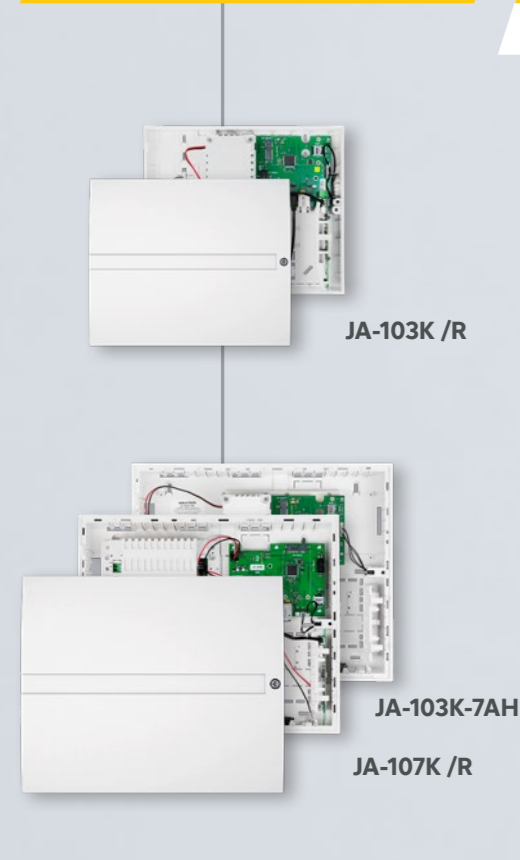

CONTROL DEVICES

KEYPADS AND ACCESS MODULES	REMOTE CONTROLS	EMERGENCY DEVICES	AUTHORIZATION DEVICES
<ul style="list-style-type: none"> ■ JA-116E □ JA-156E ■ JA-112E □ JA-152E ■ JA-113E □ JA-153E ■ JA-115E □ JA-155E ■ JA-114E □ JA-154E ■ JA-110E □ JA-150E 	<ul style="list-style-type: none"> ■ JA-120E □ JA-159J □ JA-152J MS II □ JA-154J MS II □ JA-182J 	<ul style="list-style-type: none"> ■ JA-112J □ JA-188J □ JA-187J □ JA-156J □ JA-157J □ JA-158J 	<ul style="list-style-type: none"> ■ JABLOTRON JA-190J □ JA-193J ■ JA-192J □ JA-196J ■ JA-194J □ JA-195J

INTERNAL DETECTORS

MOTION (PIR)	PHOTO-VERIFICATION	COMBINED (PIR + GLASS BREAK)	DUAL (PIR + MW)	OPENING	MOTION	OPTICAL
<ul style="list-style-type: none"> ■ JA-112P □ JA-152P ■ JA-110P /PET □ JA-150P /PET ■ JA-115P □ JA-155P 	<ul style="list-style-type: none"> ■ JA-122PC □ JA-162PC ■ JA-120PC □ JA-160PC ■ JA-120PC (90) □ JA-160PC (90) 	<ul style="list-style-type: none"> ■ JA-122PB □ JA-162PB ■ JA-120PB □ JA-180PB 	<ul style="list-style-type: none"> ■ JA-122PW □ JA-162PW ■ JA-120PW □ JA-180W 	<ul style="list-style-type: none"> ■ JA-111M □ JA-151M ■ JA-113M □ JA-153M □ JA-150M ■ JA-112M 	<ul style="list-style-type: none"> □ JA-152M □ JA-182M □ JA-152SHM ■ JA-110B □ JA-180B ■ JA-111SH □ JA-182SH 	<ul style="list-style-type: none"> □ JA-158P □ JA-159P □ JA-169P □ JA-157P

SIRENS

EXTERNAL	INTERNAL
<ul style="list-style-type: none"> ■ JA-115A □ JA-165A 	<ul style="list-style-type: none"> ■ JA-110A / II □ JA-150A II □ JA-152A □ JA-154A ■ JA-111A-BASE-RB □ JA-163A-BASE-RB JA-1x1A-C /-B JA-1x1A-C-ST /B

ENVIRONMENTAL DETECTORS

GAS LEAK	FLOOD	FIRE	HEATING
<ul style="list-style-type: none"> EI208W EI208DW GS-133 □ JA-150G-CO ■ JA-110G-CO 	<ul style="list-style-type: none"> ■ JA-110F LD-12 LD-81 	<ul style="list-style-type: none"> ■ JA-110ST □ JA-150ST ■ JA-111ST-A □ JA-151ST /-A 	<ul style="list-style-type: none"> ■ JA-111TH □ JA-151TH ■ JA-110TP □ JA-150TP ■ JB-EXT-TH-B □ JB-EXT-TH-R □ JB-150N-HEAD

MODULES

INPUT	OUTPUT
<ul style="list-style-type: none"> ■ JA-114HN ■ JA-116H ■ JA-118M □ JA-162M ■ JA-111H-TRB ■ JA-111H-AD TRB 	<ul style="list-style-type: none"> □ JB-160N-PLUG □ JB-161N-PLUG □ JB-162N-PLUG □ JB-163N-PLUG ■ JB-118N □ JA-150N □ JA-151N ■ JB-110N ■ JB-111N □ AC-160 DIN □ AC-160-C ■ JA-110N-DIN □ JA-150EM-DIN ■ JA-120N ■ JA-112I JA-111I

SYSTEM DEVICES

RADIO MODULES	COMMUNICATORS	ACCESSORIES	IP CAMERAS
<ul style="list-style-type: none"> ■ JA-111R PLV-JA111R ■ JA-111R 80 	<ul style="list-style-type: none"> JA-190X* JA-191Y* JA-192Y JA-194Y JA-194Y-LITE 	<ul style="list-style-type: none"> □ JA-150R ■ JA-120Z JA-110Z ■ JA-110T ■ JA-121T 	<ul style="list-style-type: none"> JI-113C JI-114C JI-114C-A JI-120T



■ - BUS devices
□ - WIRELESS devices

*Not compatible with control panels 103K and 107K series.

NEW PRODUCTS

in **JABLOTRON 100+** portfolio

JABLOTRON 100+

www.jablotron.com

PRODUCT MAP



JI-113C Outdoor network camera 5MPx – turret

Outdoor camera in turret design combines sharp images and compact design. Clear recordings in all weather conditions are always at your fingertips thanks to the MyJABLOTRON app.

JI-114C Outdoor network camera 5MPx - bullet

The outdoor camera in bullet design is very distinctive and visible. As a result, it acts partly as a deterrent against potential intruders.



JI-114C-A Outdoor network camera 5MPx - bullet audio

The outdoor bullet-style camera has an integrated speaker, microphone, and color LED diodes. It allows the user to trigger audio and visual alerts as needed from the MyJABLOTRON application.

JI-120T IP transmitter for RTSP cameras

This universal IP transmitter allows the connection of third-party cameras to the JABLOTRON system via the RTSP protocol. It extends the functionality of your JABLOTRON alarm system to include cameras already installed in the building.



JA-154A Wireless indoor siren

The wireless siren can be easily mounted anywhere within range of the system radio. Flexible installation is made possible by power from 3 AA batteries.

JABLOTRON 100+ system parameters

up to
15
sections

up to
600
users

up to
230
peripherals


up to
128
PG outputs

EN
50131

2
GRADE

CE
CERTIFICATION

UK
CA



C-EN+MAP24082



JABLOTRON